




## Water Supply Unit

### Product Images

---

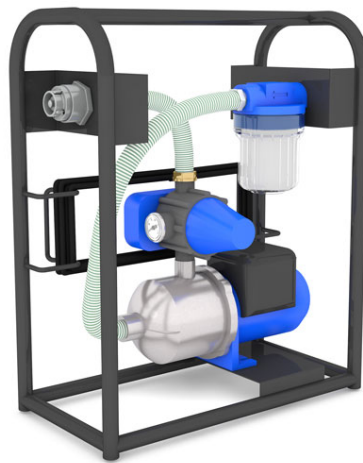

### Short Description

---

This water supply unit is used for the reliable delivery of fresh water to the water flow heater where a public water source is not available.

### Description

---

This water supply unit is used for the reliable delivery of fresh water to the Water Flow Heater where a public water source is not available eg. from low pressure supply sources (tank reservoir, bladder, natural source etc). It can also be used where the public water network cannot provide enough water pressure. Constructed using a steel framework with a horizontally mounted centrifugal pump with stainless steel interior. Features include Storz D connectors, inlet filter and check valve, pressure gauge and automatic pressure regulator.

## Additional Information

---

Width	285 mm
Water temperature	max. 45°C
Frequency	50 Hz
Height	675 mm
Length	575 mm
Operating pressure	6 bar
Plug	P54
Application area	Civil Defence, Field Hospitals, Military, Decontamination and Hazardous Goods Operations, Weatherproof Shelter for Sensitive Equipment and Workshops, United Nations, NGOs/Humanitarian organizations, Associations & Youth groups – tent camps
Main fuse	6.7 A
Input pressure	3 bar
Suction depth	8 m
Voltage	230 V
Flow rate	max. 70 l/min.
Weight	25.000000